


LOCAL OPTION

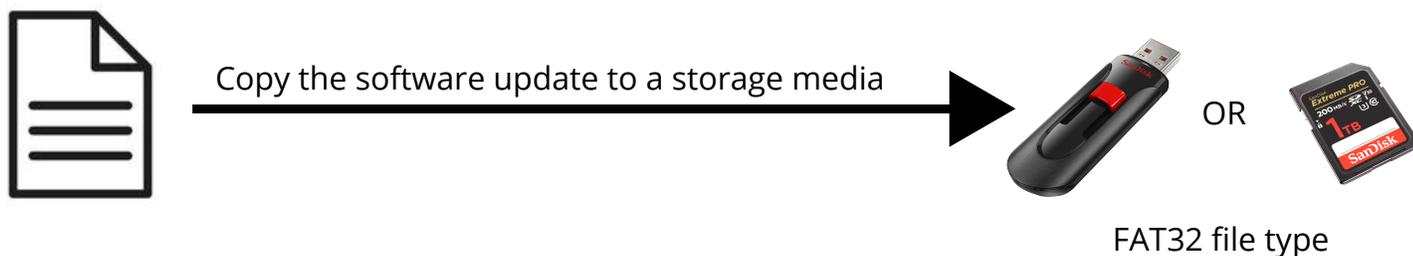


At the root,

- A. Create a folder and name it: upgrade
- B. inside upgrade folder, create another folder and name it: packet
- C. inside packet folder, create another folder and name it: local
- D. inside local folder, put the update file.

The structure should be like this: upgrade/packet/local/the update file here.


- 1. Turn off the DVR.
- 2. Insert the storage media to USB port or SD CARD slot.
- 3. Turn on the DVR.
- 4. Wait for about 5 minutes for the update to be installed.

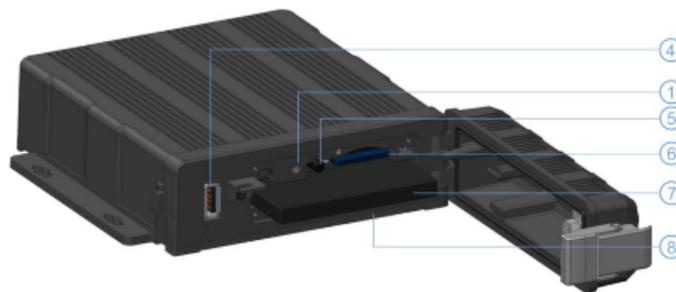


- ① LED Indicators
- ② Electronic lock
- ③ Front Cover Buckle
- ④ USB2.0 port
- ⑤ IR Receiver
- ⑥ SD Card Slot
- ⑦ SSD Slot
- ⑧ SIM Card Slot

REMOTE OPTION


1. After a DVR connected to a network, get the IP address from DVR screen menu

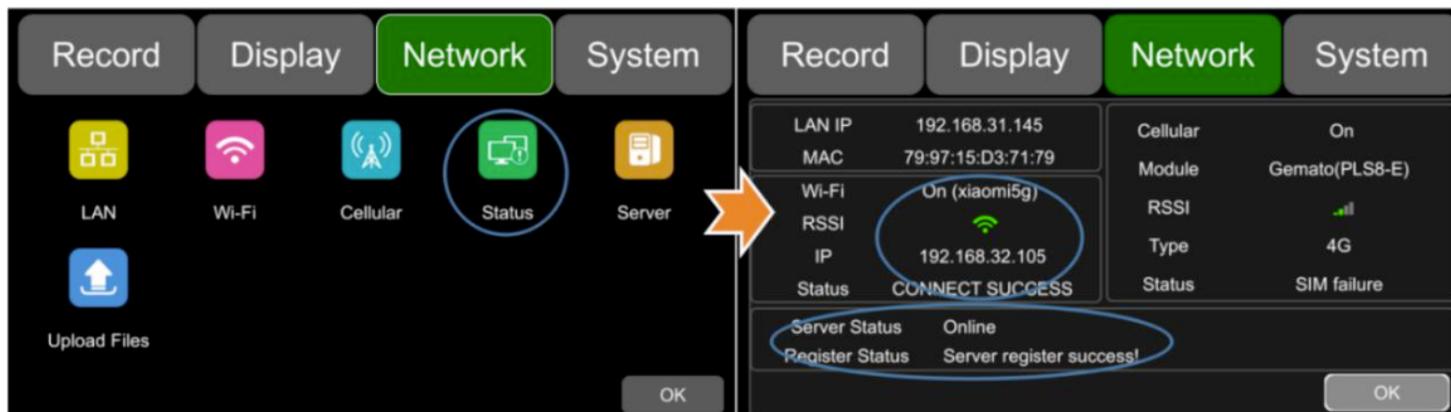

2. Open a prefer browser and type in the URL bar the IP address of DVR plus port 8081
For exmaple: 192.168.32.105:8081 then press enter/return



3. Type the username and password.
Default Username: admin Default password:123

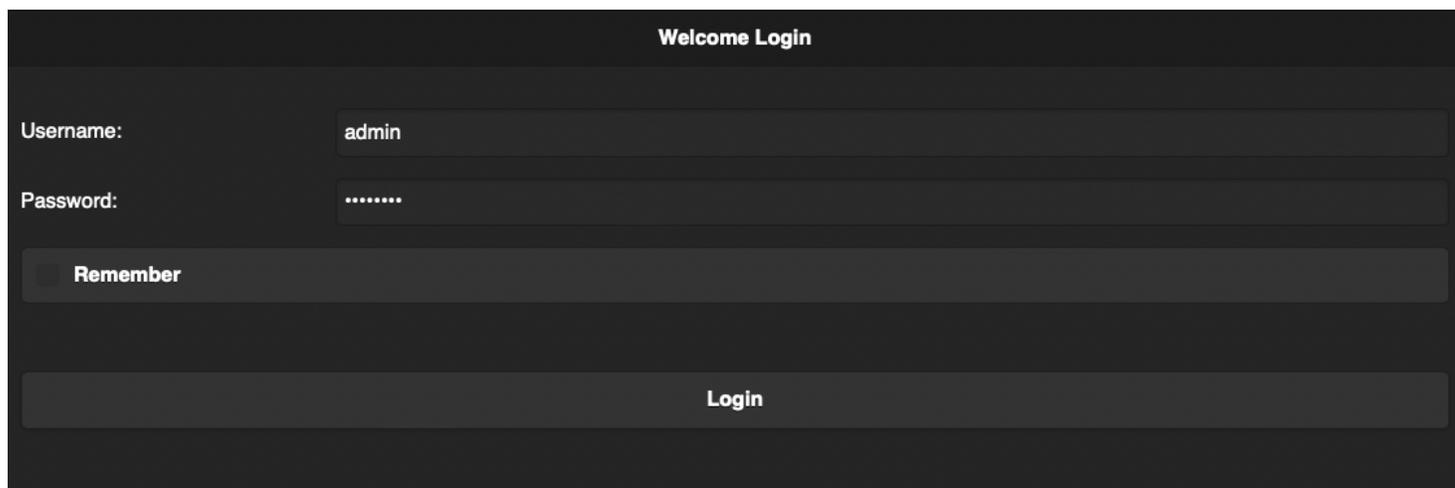


The screenshot shows the 'Welcome Login' screen of the DVR. It has a dark background with white text. The fields are as follows:



Welcome Login	
Username:	admin
Password:
<input type="checkbox"/> Remember	
Login	

REMOTE OPTION

4. Click at Home icon at the top right corner --> click at config

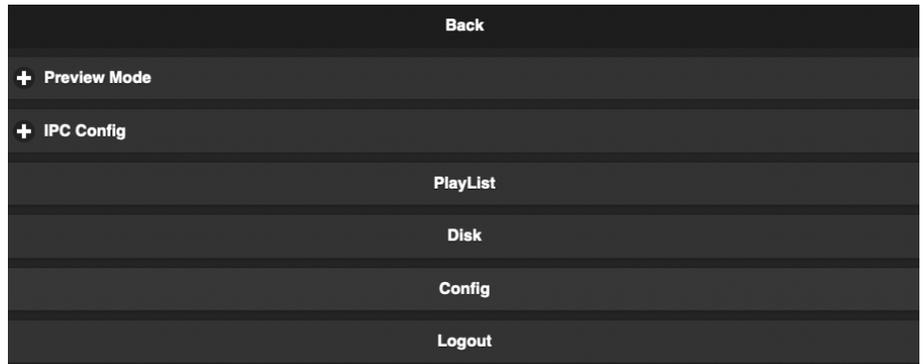

5. Click at system --> look for Update --> click at software and select the update file.

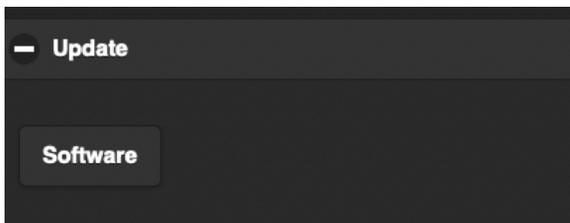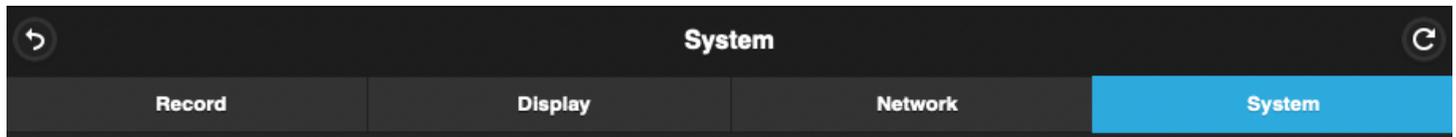

6. Wait for about 5 minutes for the update to be installed

Note:

Storage media in DVR is required.
Remote option uses the storage media in DVR as a temporary storage for the uploaded new software to preform the update.